


Specification

<u>Model</u>	<u>Material</u>	<u>Wattage</u>	<u>Color temp.</u>	<u>Beam Angle</u>	<u>Input</u>	<u>Application</u>
FlexiNeon21	Silicon	5 : 5w	27 : 2700k	180 : 180°	CV24 : 24Vdc	Outdoor & Underwater
		10 : 10w	30 : 3000k		CV36 : 36Vdc	
		12 : 12w	40 : 4000k			
		15 : 15w	60 : 6000k			
			RGB : RGB RGBW : RGBW			

Technical information.


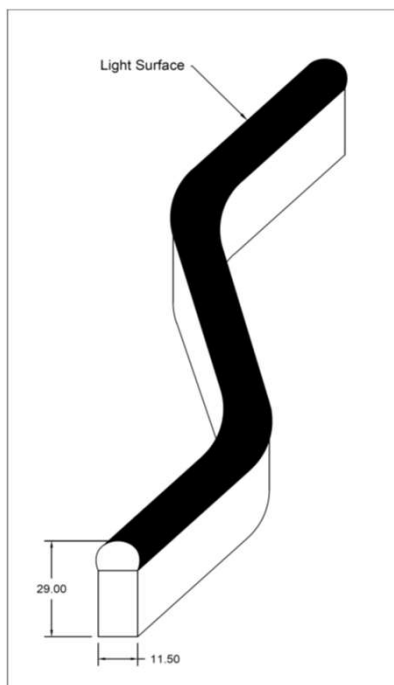


Available CT	: 2200 - 6500K
Min. Bending Radius	: Diameter 12cm
Available Colors	: R / Y / G / B / LY
Max Length Single Feed	: 10m (24Vdc & 36Vdc) 5m (12Vdc)
Max Length Double Feed	: 20m (24Vdc & 36Vdc) 10m (12Vdc)
Lumens Output	: 25 ~ 30 lm per watt




Photometric

AVERAGE BEAM ANGLE(50%):116.7 DEG

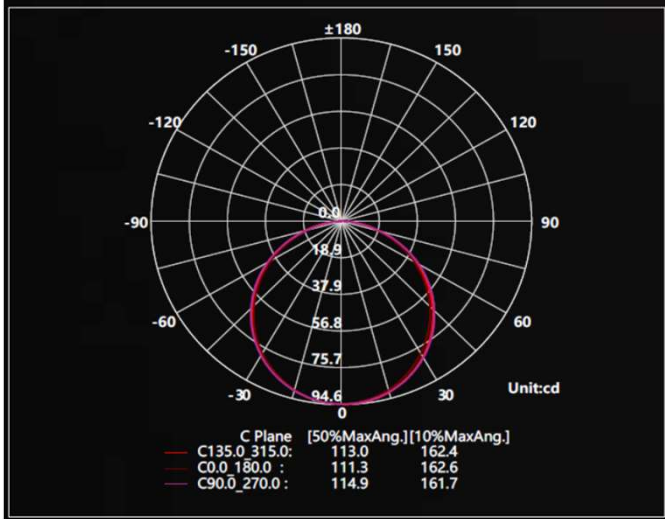

Direct Cable Entry



Side Cable Entry



Bottom Cable Entry



Stainless steel Mounting Clip



Stainless steel Flexible Mount Chanel @ 100cm (Max.)